




RYEDALE RECESS

VANDAL RESISTANT RECESSED FLUORESCENT



- IP65 – IK10 ++
- Fabricated Fully Welded Steel Body
- Regressed Gasketed Bezel
- Captive 6mm Opal or Clear Stippled Polycarbonate Diffuser
- Stainless Steel Torx Security Screw Fixing
- Removable High Frequency Gear Tray
- 4 x Adjustable Side Arm Recess Mount Brackets
- Other RAL Colour Options

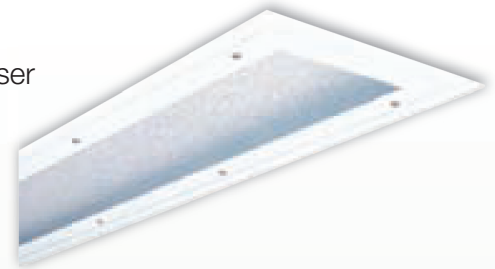

DESCRIPTION

Robust recess mounted enclosed luminaire with texture white paint finish. Regressed Bezel fully gasketed to IP65 with a captive 6 mm Polycarbonate panel. Supplied with 4 No Adjustable Side Arm Mounting Brackets.

APPLICATION

Prison Circulation Areas, Under Canopy, Corridors, Psychiatric Centres, Sub Way, Car Park etc

RANGE AVAILABLE

Catalogue No.	Description	Length (mm)	Weight (Kg)	Dimensions
RYDR114	1x14w HF T5	2ft/ 660mm	5.5 Kg	
RYDR124	1x24w HF T5	2ft/ 660mm	5.5 Kg	
RYDR128	1x28w HF T5	4ft/1260mm	8.5 Kg	
RYDR154	1x54w HF T5	4ft/1260mm	8.5 Kg	
RYDR135	1x35w HF T5	5ft/1560mm	9.5 Kg	
RYDR149	1x49w HF T5	5ft/1560mm	9.5 Kg	
RYDR214	2x14w HF T5	2ft/ 660mm	5.5 Kg	
RYDR224	2x24w HF T5	2ft/ 660mm	5.5 Kg	
RYDR228	2x28w HF T5	4ft/1260mm	8.5 Kg	
RYDR254	2x54w HF T5	4ft/1260mm	8.5 Kg	
RYDR235	2x35w HF T5	5ft/1560mm	9.5 Kg	
RYDR249	2x49w HF T5	5ft/1560mm	9.5 Kg	
Suffix				
/P	Prismatic Controller			
/O	Opal Diffuser			
/EM3	3 Hour Maintained Emergency			
/NL	Night Light			
/SD	Security Key			

*Stainless Steel version available for special applications