





EMERALD EXIT ANTI LIGATURE

Anti Ligature -
Wall Mounted Sloping Top

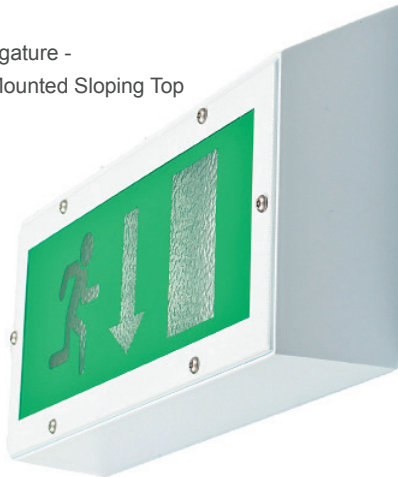


Anti Ligature -
Ceiling Mounted

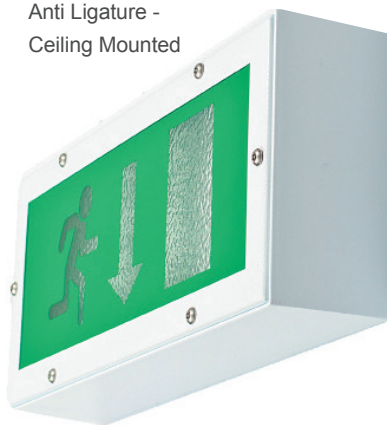


** Anti Ligature must be correctly installed using 'Anti Pick' Mastic **

- Two Body Versions
- Sloping Top Anti Ligature
Must be correctly installed using 'Anti Pick' Mastic
- Sloping Top Anti Ligature
Must be correctly installed using 'Anti Pick' Mastic
- Slim 60mm Body Depth
- Flame Retardant
Polycarbonate Flat Panel + GRP Panel Option
- Optional 'Exit Running Man' Legends (Various)
- Stainless Steel Security Screw

Anti Ligature -
Wall Mounted Sloping Top

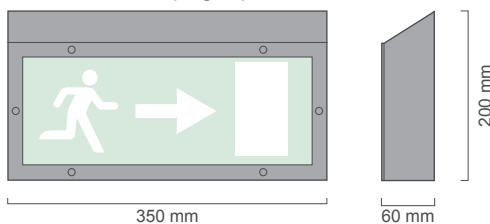

Anti Ligature -
Ceiling Mounted

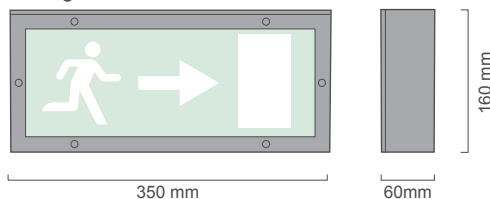

Standard Fixing Detail

- 4qty x 6mm Ø Back/Top Body Corner Mounting Holes
- 1qty x 20mm Ø Back/Top Body Centre Cable Entry Hole

Linear LED Technical Information

Please refer to website for current LED technical specification

Order Code	Length			Lumens		Im/W	Colour Temp	Ra	Weight
	HE	HO	mm	HE	HO	lumen/Circuit Wattage	Kelvin (K)		
EMXW	0.5	1.1	350	500lm	1000lm	115	3000K/4000K	>80	6.0
EMXC	0.5	1.1	350	500lm	1000lm	115	3000K/4000K	>80	6.0

Specific higher/lower lumen packages on request (above are LED comparable to T5 lamp options)

Ordering Options

Description	Pictogram	Suffix Ordering Code
Wall Mounted 'Sloping Top' Anti Ligature Version		/EMXW
Ceiling Mounted 'Flat Top' Anti Ligature Version		/EMXC
Exterior Fully Weatherproof IP65 Version		/EXT
Maintained 3hr Emergency or 3hr Self Test		/EM3 or EM3-SELF
Non Maintained 3hr Emergency or 3hr Self Test		/NM3 or NM3-SELF
Pictogram DOWN		/PD
Pictogram LEFT		/PL
Pictogram RIGHT		/PR
Pictogram DOOR		/PE
Pictogram STRAIGHT ON		/PU
Security Driver/Key		/SD
Fluorescent Lamp Version		/On Request