




REFLEX RECESS 190

Additional Body Sizes Available In Reflex Recess Range - See Other Product Pages


190 Miniature Version

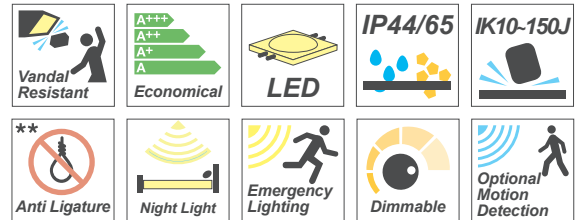

** Anti Ligature must be correctly installed using 'Anti Pick' Mastic **

- Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- High Grade Aluminium or Steel Body
- Flat Panel Frosted or Clear Prismatic Polycarbonate Diffuser Bezel
Can be removed without disturbing 'Anti Pick' Mastic
- Removable LED Gear Tray
- Integral Gear or Gear Box Options

Reflex Recess 190 - Mini 190mm Ø

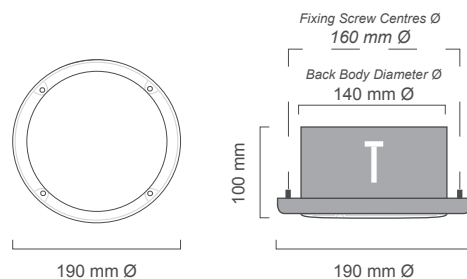

Recess Cut Out Dimensions	Recess Flange Dimensions
165mm Ø	190mm Ø

Standard Fixing Detail

- 3qty x T-Slot Side Arm Recess Mounting Brackets
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole
- Optional Back Body Mounting (on request)

LED Technical Information

Please refer to website for current LED technical specification

Order Code	Lumen	mA	lm/W	Colour Temp	Ra	Weight
	Lm	forward current	lumen/Circuit Wattage	Kelvin (K)	CRI	Kg
RFXR(M)0.3LED	350lm	175	95	3000K/4000K	>80	1.7
RFXR(M)0.5LED	550lm	250	94	3000K/4000K	>80	1.7
RFXR(M)1.2LED	1250lm	350	125	3000K/4000K	>80	1.7
RFXR(M)1.7LED	1750lm	500	120	3000K/4000K	>80	1.7
RFXR(M)2.5LED	2500lm	700	114	3000K/4000K	>80	1.7

Specific higher/lower lumen packages on request (above are LED comparable to PL lamp options)

***RGB Colour Change LED & **Tuneable White LED options**

Ordering Options

Description	Suffix Ordering Code
Miniature 190mm Ø Diameter Body Version	/RFXRM-190
Exterior Fully Weatherproof IP65 Version (No T-SLOT)	/EXT
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI /1-10v /SW-240v /CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
*RGB Colour Change LED	/RGB-LED
**Tuneable White LED	/TUNE
Frosted Flat Panel Diffuser	/FL-F
Clear Stippled Flat Panel Diffuser	/FL-P
Security Driver/Key	/SD
LED Compact Lamp Gear Tray (240v Mains)	/GT-LEDPL
Fluorescent Lamp Version	/PL Lamps On Request