




WYEVALE

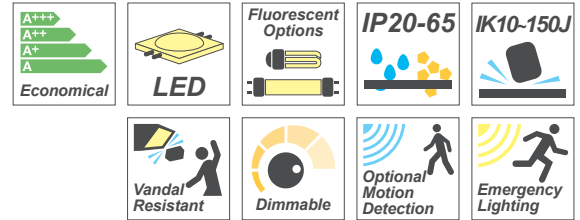

- Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Fully Welded Fabricated Steel Body
- Regressed Gasketed Bezel
- Captive Polycarbonate Diffuser
- Countersunk Stainless Steel Security Screw Fixing
- Removable LED Gear Tray

Linear LED Technical Information

Please refer to website for current LED technical specification


Order Code	HE	HO	Length mm	Lumens		lm/W lumen/Circuit Wattage	Colour Temp Kelvin (K)	Ra	Weight Kg
				HE	HO				
WYE 1.0	1.0	2.0	300	1000lm	2000lm	115	3000K/4000K	>80	4.0
WYE 1.3	1.3	2.6	600	1300lm	2600lm	115	3000K/4000K	>80	6.0
WYE 1.9	1.9	3.9	900	1950lm	3900lm	112	3000K/4000K	>80	8.0
WYE 2.6	2.6	5.2	1200	2600lm	5200lm	110	3000K/4000K	>80	10.0
WYE 3.2	3.2	6.5	1500	3250lm	6500lm	108	3000K/4000K	>80	12.0

Specific higher/lower lumen packages on request (above are LED comparable to T5 lamp options)

***RGB Colour Change LED & **Tuneable White LED options**

Ordering Options

Description	Suffix Ordering Code
IP65 Gasket	/IP65
Exterior Fully Weatherproof Version	/EXT
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
Frosted Diffuser	/F
Clear Stippled Diffuser	/P
Security Driver/Key	/SD
Stainless Steel Version (316/304/430 Grades)	On Request
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT5
Fluorescent Lamp Version	/T5 or /T8 On Request

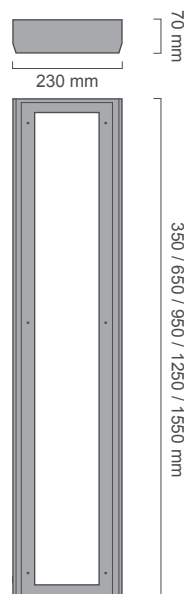

Standard Fixing Detail

- 4qty x 6mm Ø Back Body Corner Mounting Holes
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole